


Wykham Lane Closure - Diversion



POWER ON 

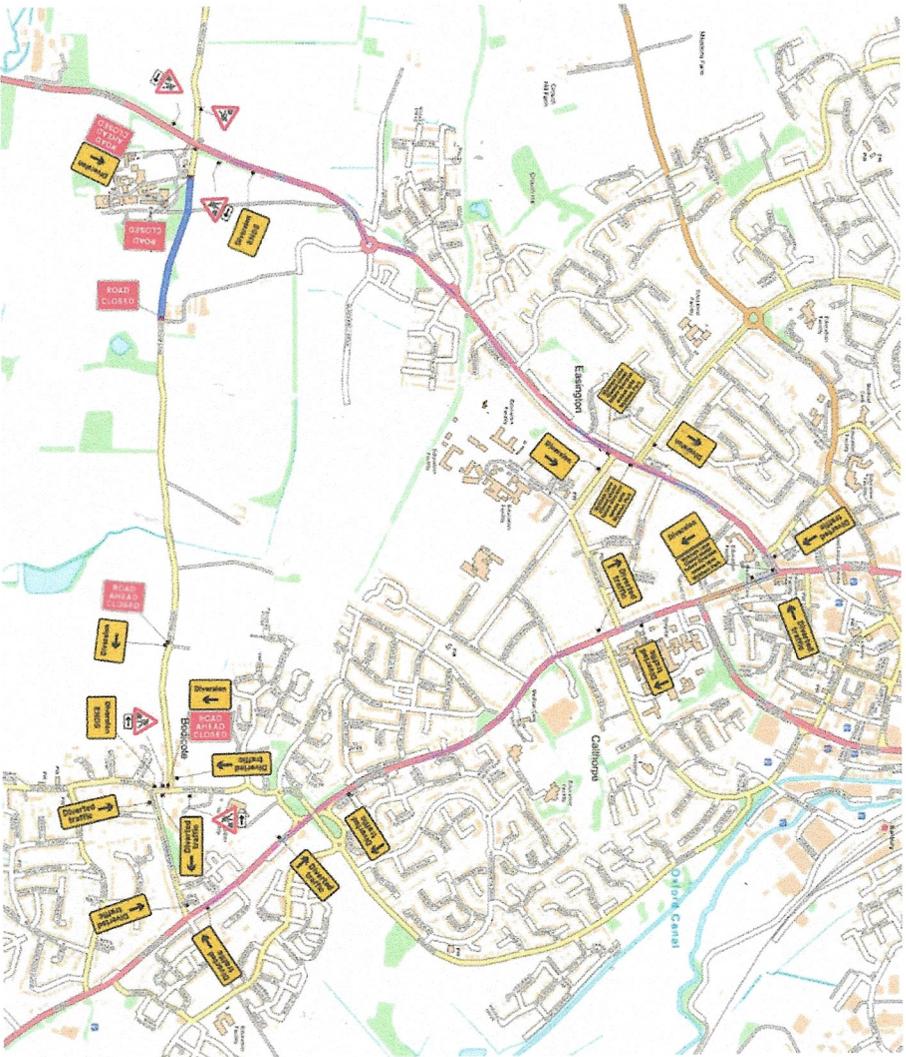

Ongoing Works/ Plan/Method

POWER ON 

- Programme – We aim to have three and four teams working at once.
- We aim to have one road completed prior starting the next, however some notices may overlap due to connecting Pipe work.
- Method of works by means of Open trench.
- Installing 1 x 150mm Rigid duct and NGED spec Tape.
- Installing 1 x 11kv cable.
- Jointing 11kv cable.
- Reinstatement of trenches to follow the national governing body HAUC.
- 11kv cable to be owned and operated by NGED.
- Bus stop suspensions will be in place and alternative bus stops provided near by.
- Current Traffic Controls will be switched off and replaced by temporary Traffic lights including temporary pedestrian crossings.

Dates works will start and finish.

POWER ON 

PROGRAMME OF WORKS

- Ells Lane Junction of Banbury Road. -30-3-26 – 12-4-26- under multiway lights = 13 days
- Molynaux Drive – 30-3-26 – 26-4-26- Multiway lights = 27 days
- Bloxham Road – 10-4-26 – 26-5-26 - 2 way and Multiway lights = 46 days
- Broad Gap – 13-4-26 – 10-5-26 – 2 way and Multiway lights = 27 days
- Weeping cross -13-4-26 -3-5-26 – Multiway lights = 20 days.
- Oxford Road – 27-4-26 – 28-5-26 - Multiway lights = 31 days.
- High Street – 1-5-26 – 17-5-26 - Multiway lights = 17 days.
- Wykham Lane – 20-5-26 -9-8-26 - Road Closure = 90 days. Road Closures.
- Ells Lane – 18-5-26 – 28-6-28 - Road Closure = 41 days. Road Closure.

Stay Informed: Website



<https://www.rcelttd.co.uk/bankside-oxford>

POWER ON 

